

**February 1, 2021**

**RE: WEST LIFT STATION  
ELKTON, SOUTH DAKOTA  
SPN #15628**

**BID LETTING: THURSDAY, FEBRUARY 4, 2021 @ 2:00 PM**

***ADDENDUM NUMBER 1***

**Notice Regarding Bid Opening:**

The bid opening will be held publicly as planned. Due to the Corona Virus the City of Elkton will set up the bid opening for social distancing as recommended by various government agencies. This includes adequate seat spacing and sanitation procedures. Anyone attending the bid opening is asked to practice safe health measures as recommended by the Centers for Disease Control and Prevention (CDC). The City of Elkton requests that attendees be limited to one person per company.

**The following modifications are to be made to the plans and specifications for the West Lift Station Project.**

**Section 26 20 00, Low Voltage Electrical System, Paragraph 2.08 B:**

Delete "steel" from the paragraph.

**Section 26 20 00, Low Voltage Electrical System, Paragraph 2.09 B shall be replaced with:**

- B. An LED flood light shall be furnished and installed on the utility pole and be located to light the area of the wet well and generator. The flood light shall be a minimum of 19,792 lumens and be Model FL5S-LED150 by RDA Lighting or approved equal.

**Section 26 20 00, Low Voltage Electrical System, Paragraph 3.02 A and B shall be replaced with the following:**

- A. Power from the existing electric meter located on the power pole approximately 65 feet east of the existing lift station will be extended to the location of the proposed electrical system. The Contractor shall coordinate with the utility company as required to complete the work.
- B. Deleted.

**Section 33 14 17, Water Service Laterals, Paragraph 2.08 D:**

Add Merrill Manufacturing M-2000 and Kupferle Corn King #903 as approved.

**Section 33 32 11, Submersible Pump Station, Paragraph 2.01 L:**

Add Xylem (CentriPro) Model Aquavar IPC and Yaskawa Model P1000 as approved.

**Section 33 32 11, Submersible Pump Station, Paragraph 2.05 F 3:**

Add Sulzer (ABS) Model XFP 100 C as approved.

**Plan Sheet 9:**

Item D in the Key shall be deleted.


Note that there are two light fixtures required in the valve vault.

**Plan Sheet 10:**

Change the 13-foot dimension to 12 feet in the section view.

**All other items of the plans and specifications remain unchanged.**

Camden A. Hofer, Project Engineer  
Schmucker, Paul, Nohr & Associates

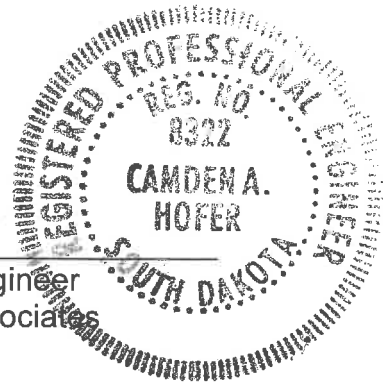

-----  
The undersigned hereby acknowledges receipt of Addendum Number 1 to the plans and specifications for the *ELKTON WEST LIFT STATION*.

FIRM NAME \_\_\_\_\_  
BY \_\_\_\_\_  
TITLE \_\_\_\_\_  
DATE \_\_\_\_\_

**ATTACH THIS SIGNED ADDENDUM NO. 1 TO THE BID FORM WHEN SUBMITTING.**